

HILO
High Quality Low Price

TNR
TAKE A NEW ROAD

HILO HLG04

46/90R57



Maximize Service Life For Rigid Dump Trucks

HLG04 Technical Data



Size	Star Rating	Load Index	TRA Code	Tread Depth (mm)	Type	Standard Rim (Rim Width & Flange)	Diameter (mm)	Section Width (mm)	Max Load (kg)	Standard Pressure (bar)	Max Speed (km)
46/90R57	★★	252	E-4	100	TL	29.00/6.0	3564	1180	63000	7	50

Tire Compound and corresponding TKPH

Size	Compound	C2	C1	R1	CS	H1	H2
46/90R57	TKPH	550	580	605	720	850	920

C2: Super Cut-resistance Compound


C1: Cut-resistance Compound

CS: High Speed Cut-resistance Compound

R1: Regular Compound

H1: High Speed Compound

H2: Heat Resistance Compound

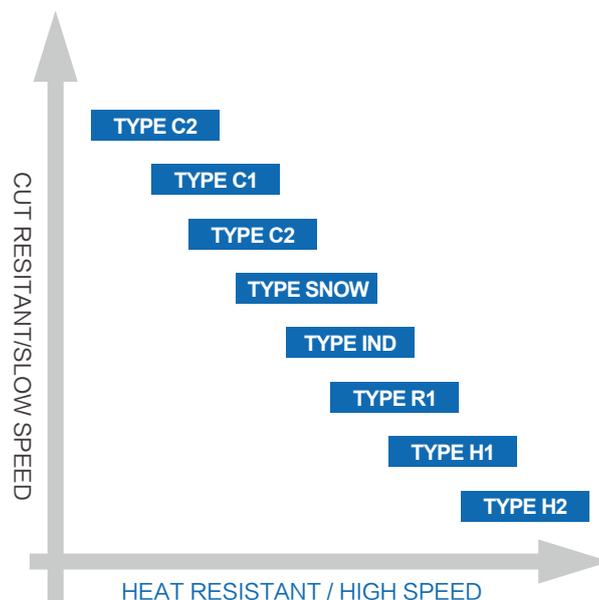

HLG04 Pattern Characteristics

Application:

Block pattern, suitable for mines with high heat generation.

Optimal tread pattern design ensures excellent traction capabilities.

Extra tread protection and sturdy sidewall design ensures high performance in hard road conditions.

Combined with a deeper tread and an increase in the volume of rubber, HLG04 delivers an improvement in tire life.

High pattern saturation, good wear resistance.

