


HILO
High Quality Low Price

TNR
TAKE A NEW ROAD

HILO HLG05

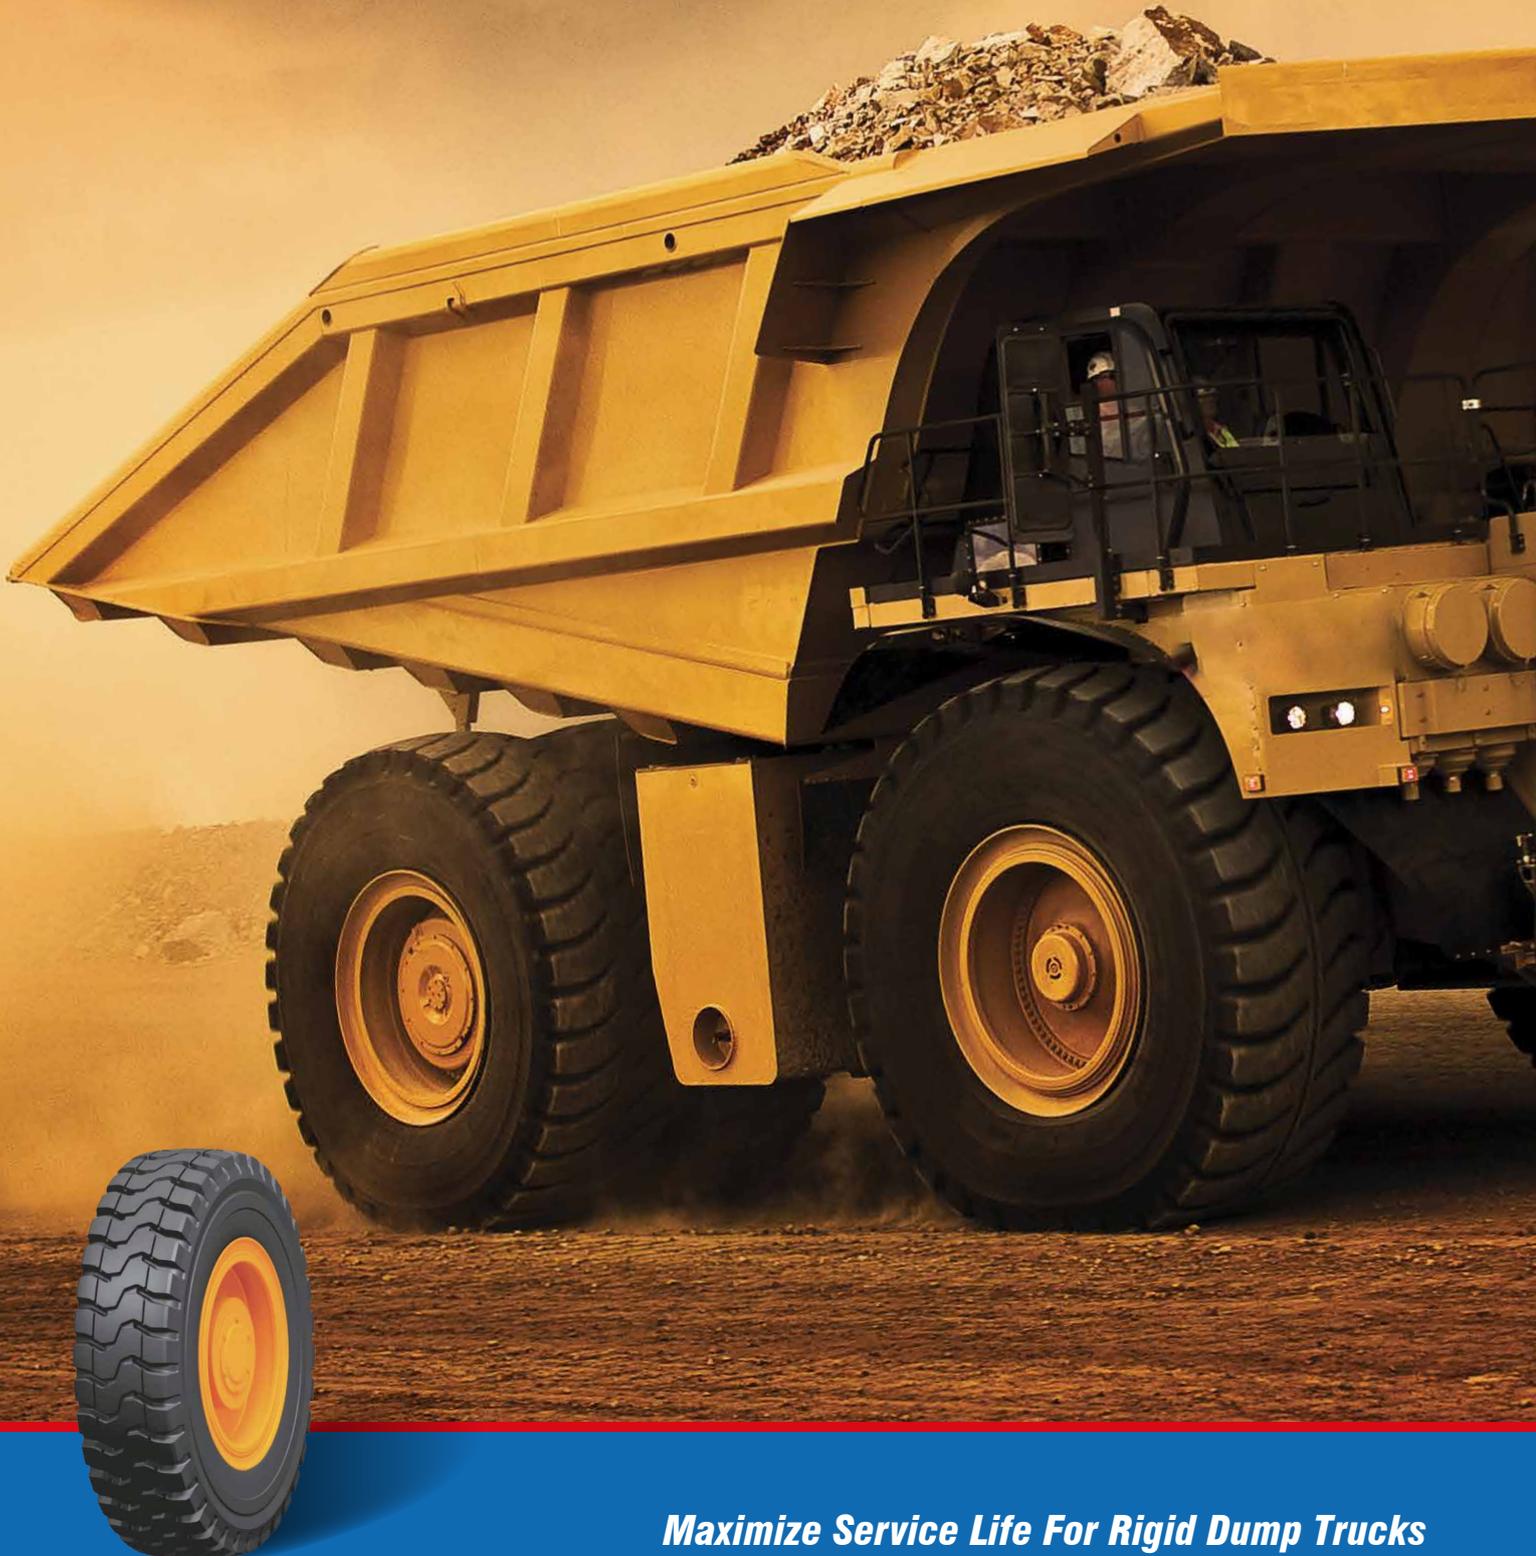

Maximize Service Life For Rigid Dump Trucks

HLG05 Technical Data



Size	Star Rating	Load Index	TRA Code	Tread Depth (mm)	Type	Standard Rim (Rim Width & Flange)	Diameter (mm)	Section Width (mm)	Max Load (kg)	Standard Pressure (bar)	Max Speed (km)
30.00R51	★★	223	E-4	64	TL	22.00/4.5	2904	823	33500	7	50

Tire Compound and corresponding TKPH

Size	Compound	C2	C1	R1	CS	H1	H2
30.00R51	TKPH	340	355	375	390	620	660

C2: Super Cut-resistance Compound


C1: Cut-resistance Compound

CS: High Speed Cut-resistance Compound

R1: Regular Compound

H1: High Speed Compound

H2: Heat Resistance Compound

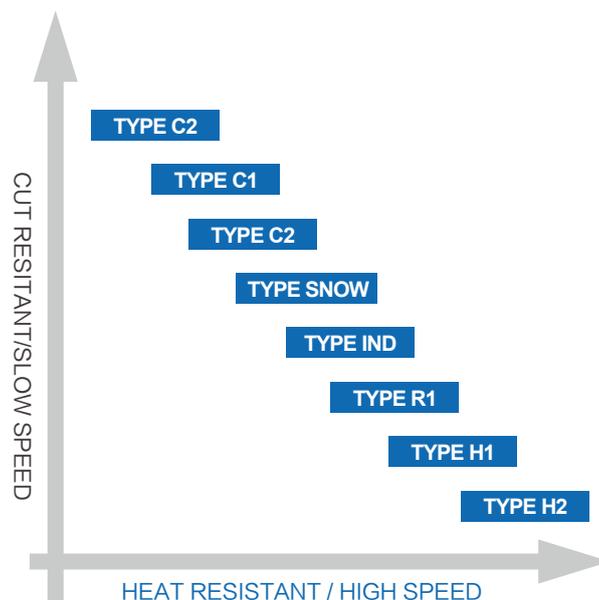

HLOG05 Pattern Characteristics

Optimal tread pattern design ensures excellent adhesion and traction performance under harsh conditions.

Rock-deep tread with tough lug and sidewall protectors ensures high resistance to cutting and chipping for long tread life.

The heat dissipation groove maximize life with minimal heat build up.

